




PIR Camera

Features

- Sony Super HAD CCD sensor
- Built-in Cone Lens
- Built-in PIR sensor board for motion detection and relay control output (option)

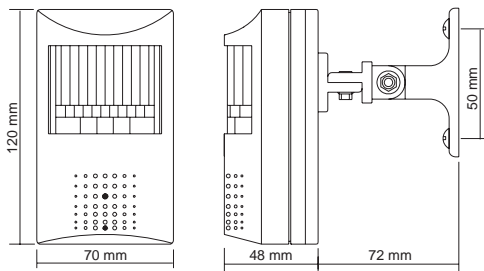

Model No.	IV-C401
	IV-C402 (PIR sensor)
Image Device	1/3" Colour Sony Super HAD
Picture Elements	NTSC:510x492, PAL:500x582
Resolution	420 TVL
Min. Illumination	0.2 Lux / F2.0
S/N Ratio	More than 48dB
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000
Gamma	0.45
Lens Furnished	Cone Lens 3.7mm / F2.0
White Balance	Auto
Gain Control	Auto
Sync. System	Internal
Video Output	1 Vp-p / 75 Ohms
Audio Output	2 Vp-p / 50 Ohms (option)
Power Supply	DC12V±10%
Power Consumption	200mA max.
Operating Temp.	-10°C ~ 50°C

■ For IV-C402

PIR N.C/N.O Relay Output	AC125V / 1A, DC30V / 2A
PIR N.C/N.O Relay Alarm Time	2~40 sec (adjustable)
PIR Detection Angle	Hor.=100° / Ver.=45°
PIR Max. Detection Range	10 M